


18-DEC-2007 DGN File: L:\Standard Drawings\Imperial\2008Approved\Signs (SN)\SN078.dgn

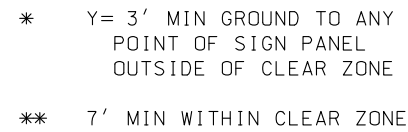

- \* INCLUDES 4' x 4' DIAMOND WARNING SIGN
- \*\* MINIMUM DISTANCE REDUCED TO 1' 2" FOR 4' x 4' DIAMOND SIGN

[illegible]

ROUTE SIGNS MIN. SIZE		
	1 & 2 DIGIT	3 DIGIT
<b>FREEWAY &amp; EXPRESSWAY</b>	36" x 36"	45" x 36"
<b>CONVENTIONAL</b>	24" x 24"	30" x 24"

1. PLACE SIGNS A MINIMUM OF 6 FEET FROM TRAFFIC FACE OF BARRIER WHEN PLACED BEHIND BARRIER.
2. PLACE SIGNS WITH A 7 FEET MINIMUM MOUNTING HEIGHT WHEN PLACED OVER PEDESTRIAN AND BICYCLE MOVEMENTS.
3. SIGN MINIMUM MOUNTING HEIGHT IS SHOWN. MAXIMUM MOUNTING HEIGHT IS 1 FOOT ABOVE MINIMUM MOUNTING HEIGHT.
4. MOUNT PRIMARY SHIELDS AT SAME HEIGHT.
5. NO LIMIT TO SIGN WIDTH WHEN SIGN MOUNTING HEIGHT IS 17 FEET OR HIGHER.
6. REFER TO STD DWG SN 12 FOR MEDIAN AND SHOULDER BARRIER MOUNT SIGN MOUNTING BRACKET DETAILS.
7. USE A MINIMUM SIGN OFFSET DISTANCE OF EITHER THE 12' OFFSET FROM THE EDGE OF THE TRAVELED WAY, OR THE 6' OFFSET FROM THE EDGE OF THE PAVED SHOULDER, WHICHEVER IS GREATER. USE A SIGN OFFSET EQUAL TO OR EXCEEDING THE CLEAR ZONE WHEREVER PRACTICAL.

UTAH DEPARTMENT OF TRANSPORTATION  
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION  
SHEET 1 OF 1  
DATE 10/20/2011

# PLACEMENT OF GROUND MOUNT AND BARRIER MOUNT SIGNS

STD DWG  
GN 7B

REVISIONS					
N <sup>O.</sup>	DATE	APPR.			REMARKS